


HIMALAYATEX

Construction and Gauge	Tufted 5/16" loop pile
Pile Content	100% Wool
Primary Backing	Woven Polypropylene
Secondary Backing	Texflor® back
Pile Weight	1000 gr/m ²
Total Weight	2300 gr/m ²
Pile Height	6,2 mm
Total Height	12 mm
Tuft Density	31000/m ²
Widths available	4 metres
Pattern Repeat	n/a
Light Fastness	≥ 4
Sound Insulation	≥ 26 dB
Tog Rating	1.7
Fire Class	E _{FL} (EN 13501-1)

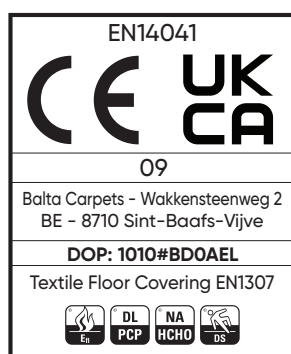

INSTALLATION : Securely fix to subfloor with either the tackless gripper method with underlay or on the double stick method.

MAINTENANCE : Daily vacuum cleaning. Shampoo when necessary in accordance with manufacturer's instructions.

While every effort is made to ensure exact colour and design reproduction, we cannot, owing to method of manufacture, guarantee perfect matching. Please note that a sample may not be from the same dye batch as the current production and therefore should be used as a guide and not as an exact colour match.

Shading is a characteristic of all cut pile carpets and is not considered to be a manufacturing defect. Shades may vary from dye lot to dye lot. Experienced professional installers are essential to ensure correct installation.

THE COMPANY RESERVES THE RIGHT TO MODIFY SPECIFICATIONS AND ALTER RAW MATERIALS RELATIVE TO IMPROVING PERFORMANCE WITHOUT NOTICE.